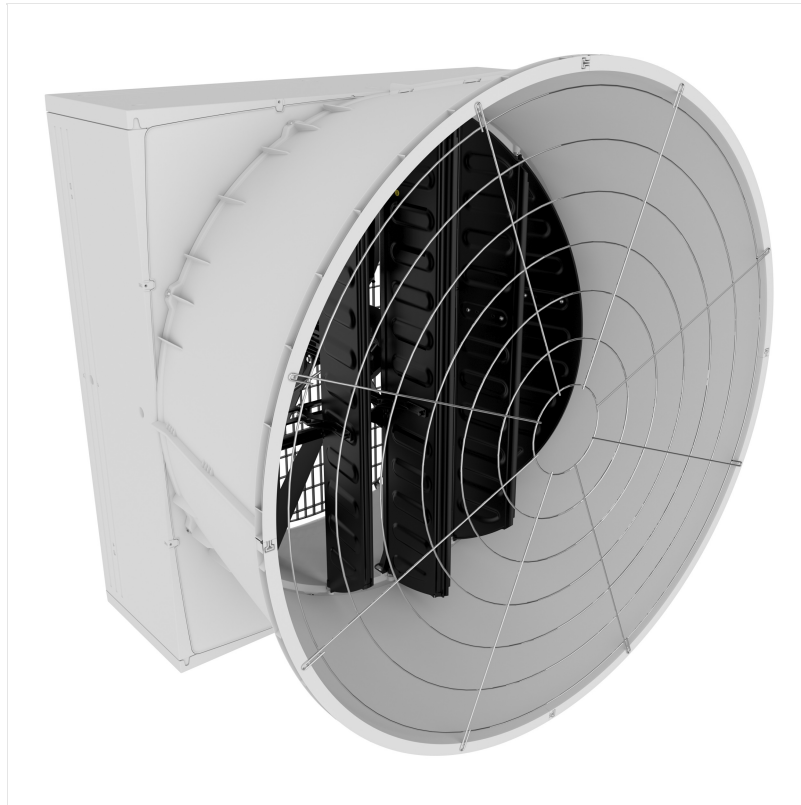


**Fan BD-Blue 130-C7 DMS 400-3-50/60 3.1A 53800m³/h**

Article number: 60-25-4588

**Basic data**

Montiert	Mounted
Thermal protection contact	No
Type	Installation at a wall
Weight	88.4 kg

Rated values

Phases	3 Ph
Nominal frequency [Hz]	50/60 Hz
Control	0-10 V

Classification

IP protection rating	IP65
Certifications	CE, UL
Efficiency rating (ErP)	E15

Dimensions

Width	1380 mm
Height	1380 mm
Total depth	1060 mm
Diameter	1270 mm
Other dimension	1600 mm

Rated values 50 Hz

Elektrische Nennleistung	1.75 kW
--------------------------	---------

**Rated values 50 Hz**

Nominal voltage star connection	400 V
Voltage tolerance	-10 - 10 %
Nominal current star connection	3,1 A
Speed	750 U/min
Power factor	0.94
Ambient temperature	-40 - 40 °C
Sound power level Lw	88 dB
Sound pressure level Lp	52 dB

Volumetric flow rate 50 Hz

Characteristic curve – 0 Pa	53800 m ³ /h
Characteristic curve – 10 Pa	52100 m ³ /h
Characteristic curve – 20 Pa	49100 m ³ /h
Characteristic curve – 30 Pa	46900 m ³ /h
Characteristic curve – 40 Pa	44900 m ³ /h
Characteristic curve – 50 Pa	42800 m ³ /h
Characteristic curve – 60 Pa	40600 m ³ /h
Characteristic curve – 70 Pa	37800 m ³ /h
Characteristic curve – 80 Pa	34700 m ³ /h
Characteristic curve – 90 Pa	31600 m ³ /h
Characteristic curve – 100 Pa	28200 m ³ /h

Spec. power 50 Hz

Characteristic curve – 0 Pa	32 W/(1000m ³ /h)
Characteristic curve – 10 Pa	34 W/(1000m ³ /h)
Characteristic curve – 20 Pa	37 W/(1000m ³ /h)
Characteristic curve – 30 Pa	39 W/(1000m ³ /h)
Characteristic curve – 40 Pa	41 W/(1000m ³ /h)
Characteristic curve – 50 Pa	43 W/(1000m ³ /h)
Characteristic curve – 60 Pa	46 W/(1000m ³ /h)
Characteristic curve – 70 Pa	49 W/(1000m ³ /h)
Characteristic curve – 80 Pa	53 W/(1000m ³ /h)
Characteristic curve – 90 Pa	63 W/(1000m ³ /h)
Characteristic curve – 100 Pa	74 W/(1000m ³ /h)

Rated values 60 Hz

Elektrische Nennleistung	1.748 kW
Nominal voltage star connection	400 V
Voltage tolerance	-10 - 10 %
Nominal current star connection	3,1 A
Speed	750 U/min
Power factor	0.94
Ambient temperature	-40 - 40 °C
Sound power level Lw	88 dB
Sound pressure level Lp	52 dB

Volumetric flow rate 60 Hz

Characteristic curve – 0 Pa	53800 m ³ /h
Characteristic curve – 10 Pa	52100 m ³ /h
Characteristic curve – 20 Pa	49100 m ³ /h
Characteristic curve – 30 Pa	46900 m ³ /h
Characteristic curve – 40 Pa	44900 m ³ /h

**Volumetric flow rate 60 Hz**

Characteristic curve – 50 Pa	42800 m ³ /h
Characteristic curve – 60 Pa	40600 m ³ /h
Characteristic curve – 70 Pa	37800 m ³ /h
Characteristic curve – 80 Pa	34700 m ³ /h
Characteristic curve – 90 Pa	31600 m ³ /h
Characteristic curve – 100 Pa	28200 m ³ /h

Spec. power 60 Hz

Characteristic curve – 0 Pa	32 W/(1000m ³ /h)
Characteristic curve – 10 Pa	34 W/(1000m ³ /h)
Characteristic curve – 20 Pa	37 W/(1000m ³ /h)
Characteristic curve – 30 Pa	39 W/(1000m ³ /h)
Characteristic curve – 40 Pa	41 W/(1000m ³ /h)
Characteristic curve – 50 Pa	43 W/(1000m ³ /h)
Characteristic curve – 60 Pa	46 W/(1000m ³ /h)
Characteristic curve – 70 Pa	49 W/(1000m ³ /h)
Characteristic curve – 80 Pa	53 W/(1000m ³ /h)
Characteristic curve – 90 Pa	63 W/(1000m ³ /h)
Characteristic curve – 100 Pa	74 W/(1000m ³ /h)